

PC POWER & COOLING®

Silencer MkIII Series – High Wattage 1200 Watt ATX (MK3S1200)

Series Wattages:

750 | 850 | **1200**

P/N: PPCMK3S1200 UPC: 842024028420

Dimension: 150 mm x 86 mm x 180 mm (W x H x D) (5.9" x 3.4" x 7.1")

Total Max Power: 1200 W @ 115 - 240Vac

Product Description:

PC Power & Cooling's Silencer Series 1200 Watt, 80 Plus Platinum, Semi-Modular, Active PFC, Industrial Grade ATX PC Power Supply, 7 Year Warranty, PPCMK3S1200

Product Overview:

Drive your computer to the max on the back of PC Power & Cooling's flagship line of Silencer MkIII power supplies featuring efficient, solid and stable power with ultra-quiet operations. For over 3 decades, PC Power & Cooling has delivered unrivaled performance to our customers. Connect our semi-modular aircraft connectors and forget about connectivity issues for life.

What's Inside:

The Silencer architecture balances the needs of enthusiasts and professionals by combining a powerful single +12V rail, 100% Japanese 105°C capacitors, continuous output at a demanding 50°C ambient temperature, and heavy-duty protection circuitries. The ultra-quiet operation gives Silencer its name. The MkIII sports a Dual Thermal Control System, a sophisticated operation that allows the PSU to switch between normal and silent mode seamlessly enabling whisper quiet operation.

Warranty

Backed by our 7-year warranty, the Silencer is the ultimate power plant for your PC as you will enjoy strong, powerful, reliable and quiet performance while you drive your PC and its applications to the max.

Features:

- ✓ Ease of installation
- ✓ 80-Plus Platinum Certified (92% Efficiency)
- ✓ 7-Year Warranty
- ✓ US Technical Support
- ✓ Temperature Range: Operating 0°C 50°C
- ✓ 140mm ball-bearing fan, varies RPM by load and temperature for whisper quiet operation
- ✓ Active Power Factor Correction (PFC) to effectively regulate input voltage
- ✓ Single +12V rail for efficient power distribution in your system
- ✓ Premium Components with 100% Japanese 105°C Capacitors
- ✓ Semi-Modular Cable Configuration using our never loose aviation connectors
- ✓ Dual-GPU Ready
- ✓ One of the lowest well-regulated electrical noise and ripple on the market





PG POWER & GOOLING®

Silencer MkIII Series – High Wattage 1200 Watt ATX (MK3S1200)

Series Wattages:

750 | 850 | 1200

P/N: PPCMK3S1200 UPC: 842024028420


Input Specifications:	
Input voltage	115-240Vac Full Range
Input frequency	50-60 Hz
Input Current	15 A (RMS)
Power Factor	Active PFC

Output Specifications:							
Voltage	+3.3V	+5V	+12V	-12V	+5Vsb		
Regulation	±3%	±3%	±3%	±5%	±5%		
Max Load	20A	20A	99.5A	0.5A	2.5A		
Ripple & Noise	50	50	80	80	50		
	mVp-p	mVp-p	mVp-p	mVp-p	mVp-p		
Protection	OVP, OPP, SCP, UVP						

Environmental specifications:		
Temperature	Operating: 0 to 50-degree C, Storage: -20 to 70-degree C	
Humidity	Operating: 10%-90%, Storage: 5%-95%	
Cooling	140mm, ball bearing fan varies RPM by load and temperature for	
	whisper quiet operation	

General specifications:			
Hold-up time	30 ms		
Efficiency	at least 92% @ 50% load, 80 Plus Platinum		
MTBF	100,000 hours		
Output Connector	20+4-pin ATX, 2 x 4+4-pin CPU, 6 x 6+2-pin PCI-E, 12 SATA,		
	4 Peripheral, 1 Floppy		
Warranty	7 years		
Languages	English, German, Spanish, French, Italian, Russian, Japanese, Chinese		

Packaging and A	Packaging and Accessories:					
Accessories	Product Manual, 4 x Mounting Thumb Screws, 14AWG Power Cord,				Product Manual, 4 x	
	5 x Nylon Cable Ties, Thank You Card, Cable Pouch, 8 Port Covers					
Product Weight (W/Cables)		Retail Package Weight		Master Case Weight (5 per)		
2.88kg (6.35lbs)		3.63kg (8.01lbs)		3.74 kg (8.25 lb)		
Retail Package Dimensions			375mm x 210mm x 145mm (14.76" x 8.267" x 5.7")			
Safety & regulati	Safety & regulations					
cTUVus, TUV, CB,		Tested To Cor With FCC Sta For Home or C CC, BSMI, C	nply ndards Office Use -Tick, ROHs, WEE			

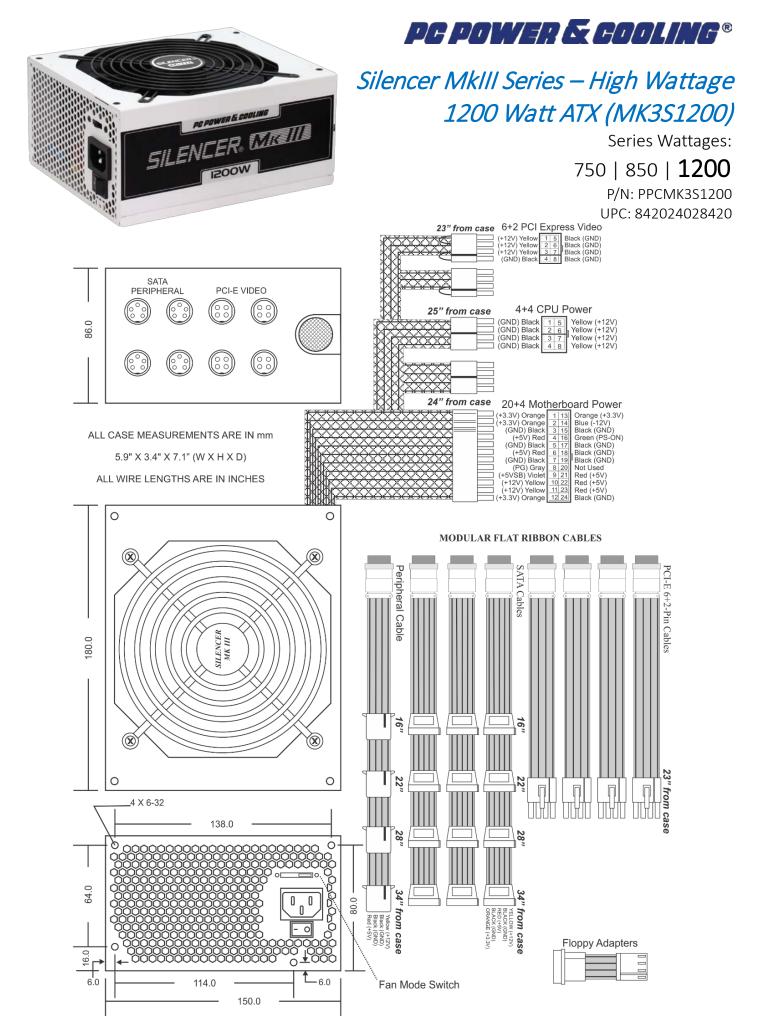





Silencer MkIII Series – High Wattage 1200 Watt ATX (MK3S1200)

Series Wattages:

750 | 850 | **1200** P/N: PPCMK3S1200 UPC: 842024028420

